



2.0A Single-Phase GLass Passivated Bridge Rectifiers

Rectifier Reverse Voltage 50V to 1000V

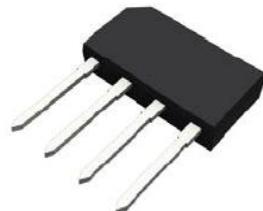

GBL

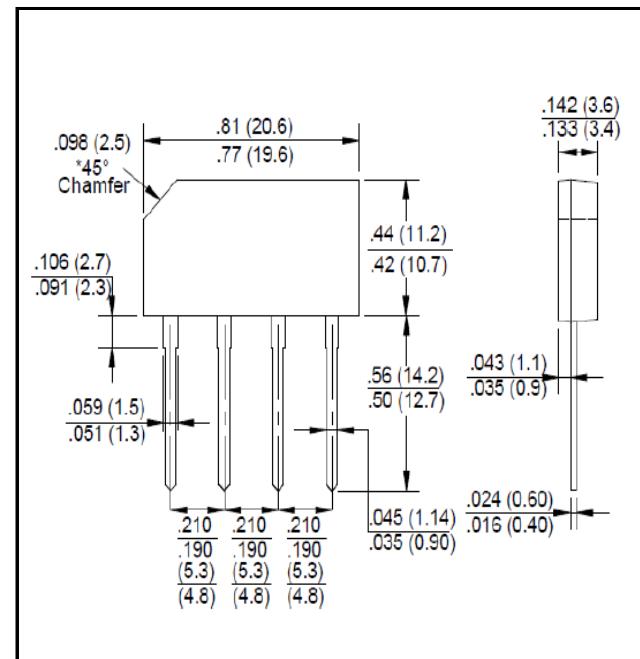

Features

- Glass passivated junction
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Surge overload ratings to 60 amperes peak
- Ideal for printed circuit board application
- High temperature soldering guaranteed 265°C/10

Mechanical Data

Case:Molded plastic

Terminals:Platde leads solderable per MIL-STD-750,
Method 2026

Polarity:Polarity symbols molded or Marked on body

Mounting Position:Any

Maximum Ratings & Thermal Characteristics

Dimensions in inches and (millimeters)

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	GBL2005	GBL201	GBL202	GBL204	GBL206	GBL208	GBL210	unit
		2GBJ005	2GBJ01	2GBJ02	2GBJ04	2GBJ06	2GBJ08	2GBJ10	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	400	600	800	1000	V
Maximum RMS bridge input voltage	VRMS	35	70	140	280	420	560	700	V
Maximum DC blocking voltage	VDC	50	100	200	400	600	800	1000	V
Maximum average forward rectified output current at TA=40°C	IF(AV)	2.0						A	
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	IFSM	60						A	
Operating temperature range	TJ,	-55 to +150						°C	
Storage temperature range	TSTG	-55 to +150						°C	

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or inductive load, 60HZ.

For Capacitive load derate current by 20%

Parameter	Symbol	GBL2005	GBL201	GBL202	GBL204	GBL206	GBL208	GBL210	unit
		2GBJ005	2GBJ01	2GBJ02	2GBJ04	2GBJ06	2GBJ08	2GBJ10	
Maximum instantaneous forward voltage drop per leg at 2.0A	VF	1.1						V	
Maximum DC reverse current at rate TA=25°C DC blocking voltage per element TA=125°C	IR	10 500						UA	

Rating and Characteristic Curves (TA=25°C Unless otherwise noted)

